


Lucky

by **Carter**
Enterprises

Accuracy Defined Through Design

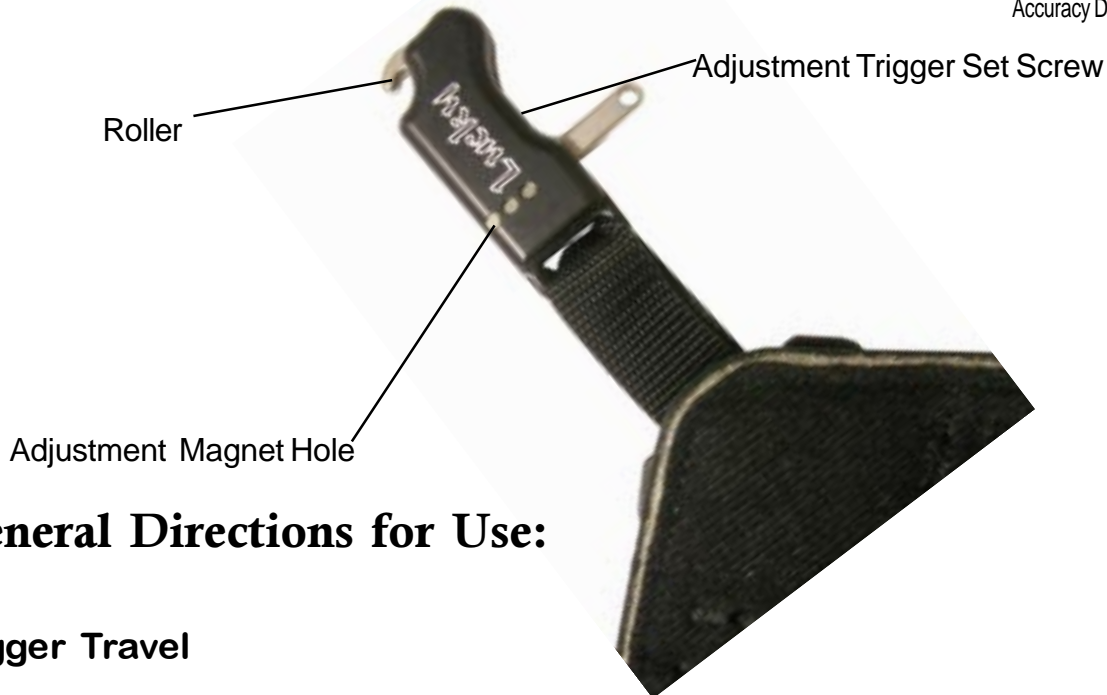

General Directions for Use:

Trigger Travel

To adjust the trigger travel, turn the set screw counterclockwise for more travel and clockwise for less travel. After adjusting the set screw, test the release by hooking a string to a stationary object and pull-test and fire the release to make sure it is safe to hold drawing weight.

Caution: *If the set screw is adjusted for insufficient travel, the release may fire prematurely and possibly cause damage or injury.*

Trigger Tension Adjustment

The Lucky features our new Magnetic Attraction Tension System. In order to decrease tension, simply remove magnets by pushing the desired number of magnets out with a hex key or similar small tool. In order to increase tension, simply re-install the desired magnets

Strap Adjustment

Loosen the two 3/32 screws on the clamp of the strap and adjust to desired length. Retighten for a solid, no slip fit.