


Two Shot

by **Carter**
Enterprises
Accuracy Defined Through Design

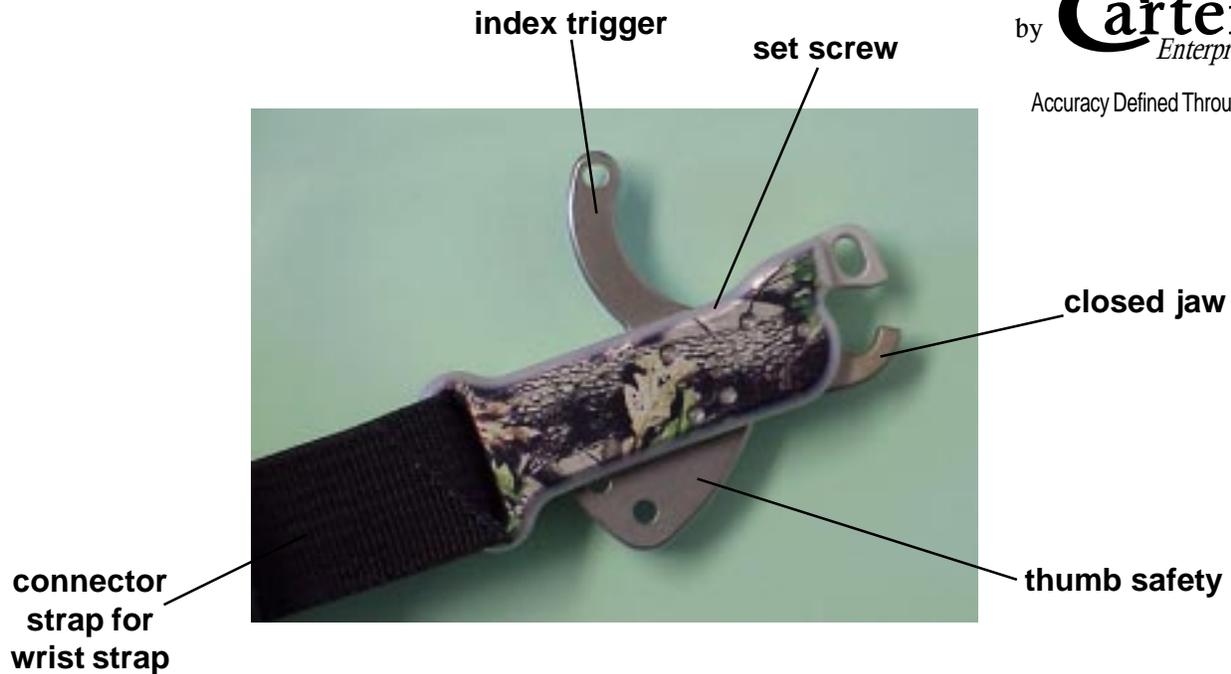

General Directions for Use:

Set Screw

To adjust the trigger travel*, turn the set screw clockwise for less travel, and counterclockwise for more travel. After adjusting the set screw, test the release by hooking a string to a stationary object and test-firing the release. Caution: if the set screw is adjusted for insufficient travel, the release may fire prematurely and possibly cause damage.

**Travel refers to the degree the trigger will move prior to the release firing.*

Adjusting Release Length

The length of this release can be adjusted by lengthening or shortening the connecting strap which links the wrist strap to the head of the release. Once you have adjusted the length, loop the strap back through the small buckle to secure its position. *Warning: Failure to double-back through the small buckle on the connector strap could cause the head of the release to come loose during the execution of a shot.*

Recommended Use

Carter Enterprises recommends shooting the Two Shot using back-tension form. To use back-tension form, secure the strap around your wrist, grip the release with the same hand, and press down on the thumb safety to lock the jaw around the rope or D-loop. Maintain pressure on the thumb safety and avoid touching the index finger trigger while drawing back to help prevent the release from misfiring prematurely. Once you are at full draw, make a "C" with your index finger while placing it gently on the trigger. Next, remove your thumb from the thumb safety, push your bow hand toward the target, and lightly pull your release hand back to increase pressure on the trigger, thus firing it in one smooth motion.

For more information, contact Carter Enterprises technical support at 1-208-624-3467.